


Passive fiber product map

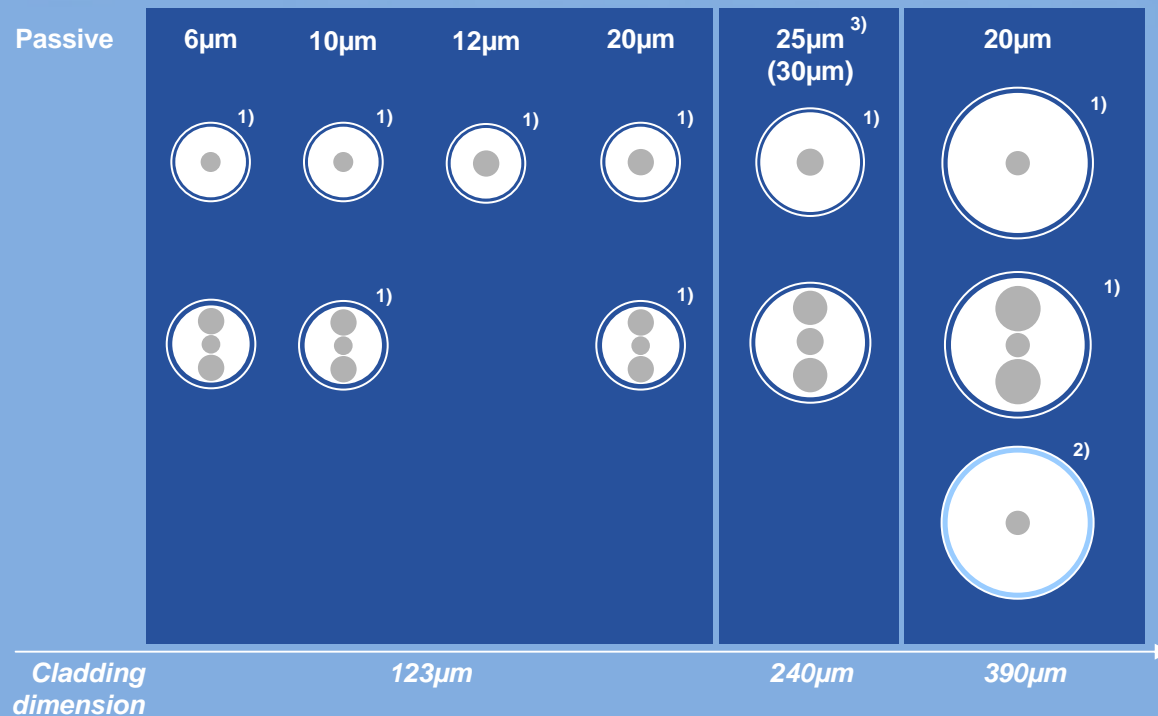

Passive fiber specifics

- (1) Single- and double clad versions available, both dual coated
 - (2) Pump channel glass outer diameter 400µm, fluorosilicate glass outer diameter 460µm
 - (3) Two core sizes available
- Smaller cladding size used to ensure pump channel outer diameter is less than that of active fiber
 - For 4µm and 6µm active cores, standard SMF and HI1060 fibers can also be considered as matching passive fibers